

# WT 2L 175X Spark Arrestor


Centrifugal Range




Power Range HP - (Kw)	Exhaust Gas Flow Rate 500°C (calculated)	Weight
95 - 200 (71 - 149)	850 CFM @ 15" H <sub>2</sub> O	7.5 Kg

## WT 2L 175X PRODUCT DIMENSIONS

Standard configuration

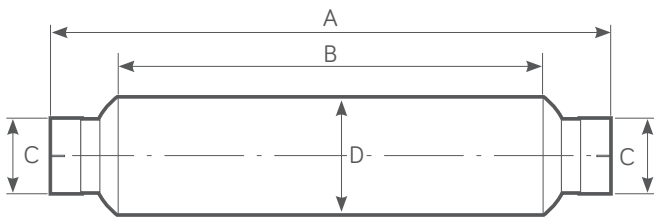

Optional side inlet/outlet configuration by request

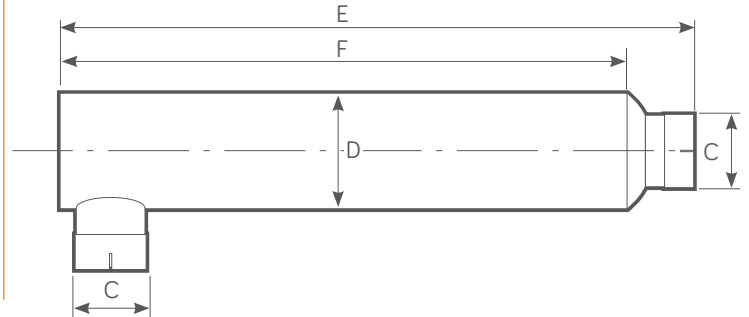


(A) mm	(B) mm	(C) mm (Inches)	(D) mm	(E) mm	(F) mm
865	645	76.2 - 101.6 (3 - 4)	177.4	935	820

## FEATURES

- Twin Centrifuge Type.
- Good Silencing.
- Intended for permanent installation.
- Used with or as replacement for muffler.
- Improved internal gas flow dynamics.
- 100% Stainless Steel Construction - ATEX & UKEX Approved
- Stainless Steel - Self colour or polished (optional)
- Optional Mild Steel - Non ATEX, Non UKEX
- Mild Steel - Heat Resistant Black Paint.

## WT 2L 175X FLOW PERFORMANCE

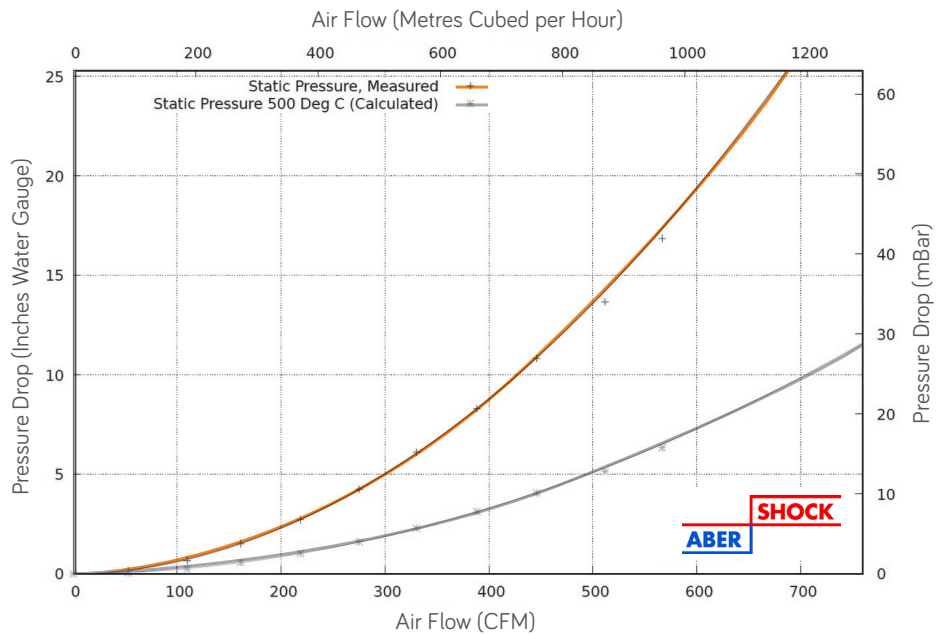

## TESTED AND APPROVED

- To ATEX EN1834 (parts 1, 2 & 3)
- ATEX Approved Body No. 2776
- UKEX Approved Body No. 2503



ISO9001-2015

wyndham|page